
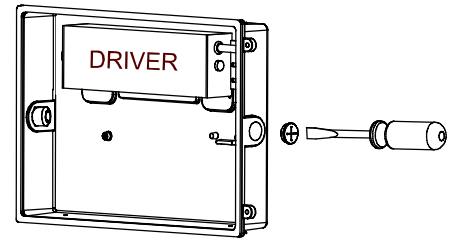


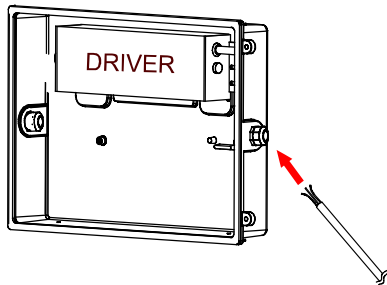
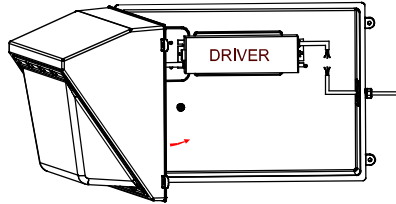
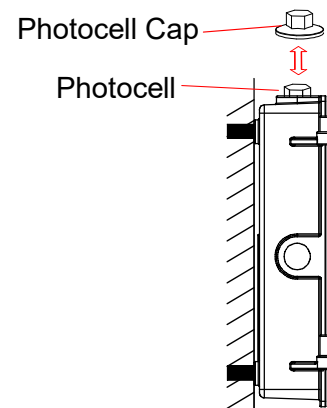
1.Take down wallpack base(pic 1)



2.Fix base on the wall(pic 2)



3.Take down screw(pic 3)

4.Install waterproof connector first,
then pass through AC line(pic 4)5.Put the cover on the base,join the DC
end waterproof connector with each
other, and tighten the cover
Cover,and screw to fix(pic 5)

If you need the photocell sensor function,please take of the photocell cap

Hou to adjust the color temperature of the light

Warm notice:

- 1.Please turn off the light before adjusting cct.
- 2.only turn on the light after you finished the CCT selection.

CCT Selections:

There are 3 color temperatures available (ww cw/ww cw)
Please select the color temperature you prefer
before installation

WW	CW/WW	CW
3000K	4000K	5000K

Power Selections:

Move the power selection switch from left to right
light power decreases gradually

H	M	L
100%	80%	60%

