



## Ceiling Installation


**Warning:** Turn off the power before installation

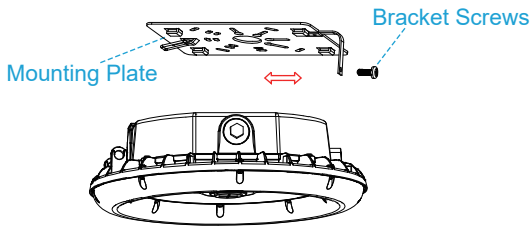


1. Unscrew the bracket screws and remove the mounting plate from the lamp housing.

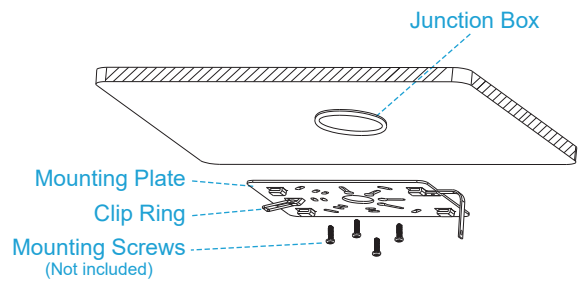

2. Secure the mounting plate to the ceiling using screws.

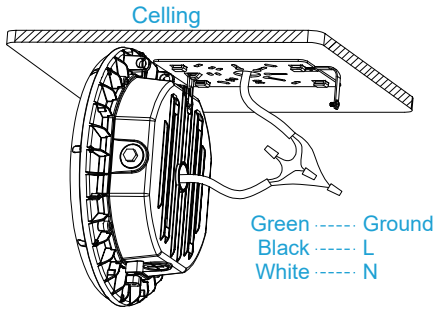


3. Insert the clip ring of the plate into the latch of the light fixture housing, and hang the fixture on the bracket.
4. Disconnect the power supply and properly connect the fixture's wiring (live wire, neutral wire, and ground wire) to the corresponding power supply wiring.

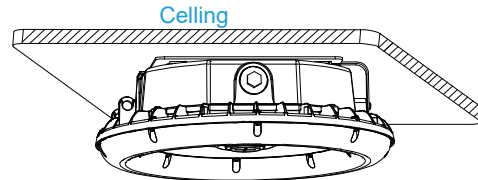

5. If there are color temperature and power adjustment functions, set them to the desired settings.
6. Remove the light sensor cap if you need the light sensor function.
7. Push the fixture into the plate and tighten the screws to secure the fixture in place.

## Suspension Rod Installation

1. Connect the lamp input line to the mains.

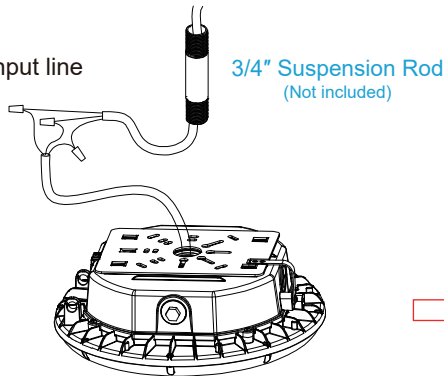

2. Twist the light fixture to the installation pole to secure it.

3. Remove the light sensor cap if you need the light sensor function.

## How to adjust the power and color temperature of the light:

### \* Tips:

1. Make sure power off before adjust.
2. Please unscrew the background driver cover.
3. Adjust power and CCT accordingly.

### CCT Selections:

There are 3 color temperatures available (WW CW/WW CW). Please select the color temperature you prefer before installation.

WW	CW/WW	CW
4500K	5000K	5700K

### Power Selections:

Move the power selection switch from left to right. Power decreases accordingly.

H	M	L
100%	80%	60%

