

LED Canopy Light

- Ideal for indoor or half outdoor lighting, like indoor parking, gas stations, stairwells, passageway's, toll booth's, waiting rooms, etc
- IP65 Waterproof, perfect for any damp or wet Locations.
- Resists rust, corrosion, cracking and any electrical shocks or fires due to moisture
- Corporate & office, education, government, healthcare industrial & warehouse, municipal, parking, petroleum & convenience stores, recreation & public venues, restaurants & hospitality, retail & grocery




Features

- Photocell dusk to dawn
- Reflective lens design to optimize lighting efficiency and minimize glare
- The super thin appearance design conforms to modern aesthetic
- Cast aluminum thermal management for optimal heat sinking
- Suitable for recessed or surface mounted installation
- Protective powder coating for lasting appearance
- PC cover milky & transparent
- Working temperature(F): -30° F to 130°F
- High output 150LM/W SMD3030 chips
- Sturdy die-cast aluminum housing
- IP65 rating for outdoor use
- Instant start, no noise, no flickering
- Mounts to standard junction boxes
- Adjustable CCT: 4500K/ 5000K/ 5700K
- Adjustable power: 60%/ 80%/ 100%
- Top quality with 5 years warranty

CCT Adjustable



Power Adjustable



Applications

Airport, auto dealership, corporate & officem, education, government, healthcare, industrial & warehouse, municipal, parking, petroleum & convenience stores, recreation & public venues, restaurants & hospitalityretail & grocery




Sports Centers



Stations




Workshop

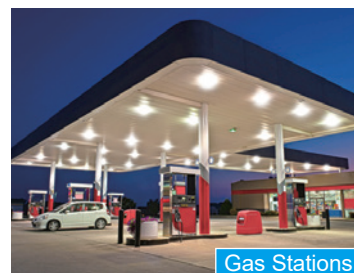

Gas Stations

40W/ 60W/ 80W/ 100W


Weight: 1900g/ 4.19 lbs

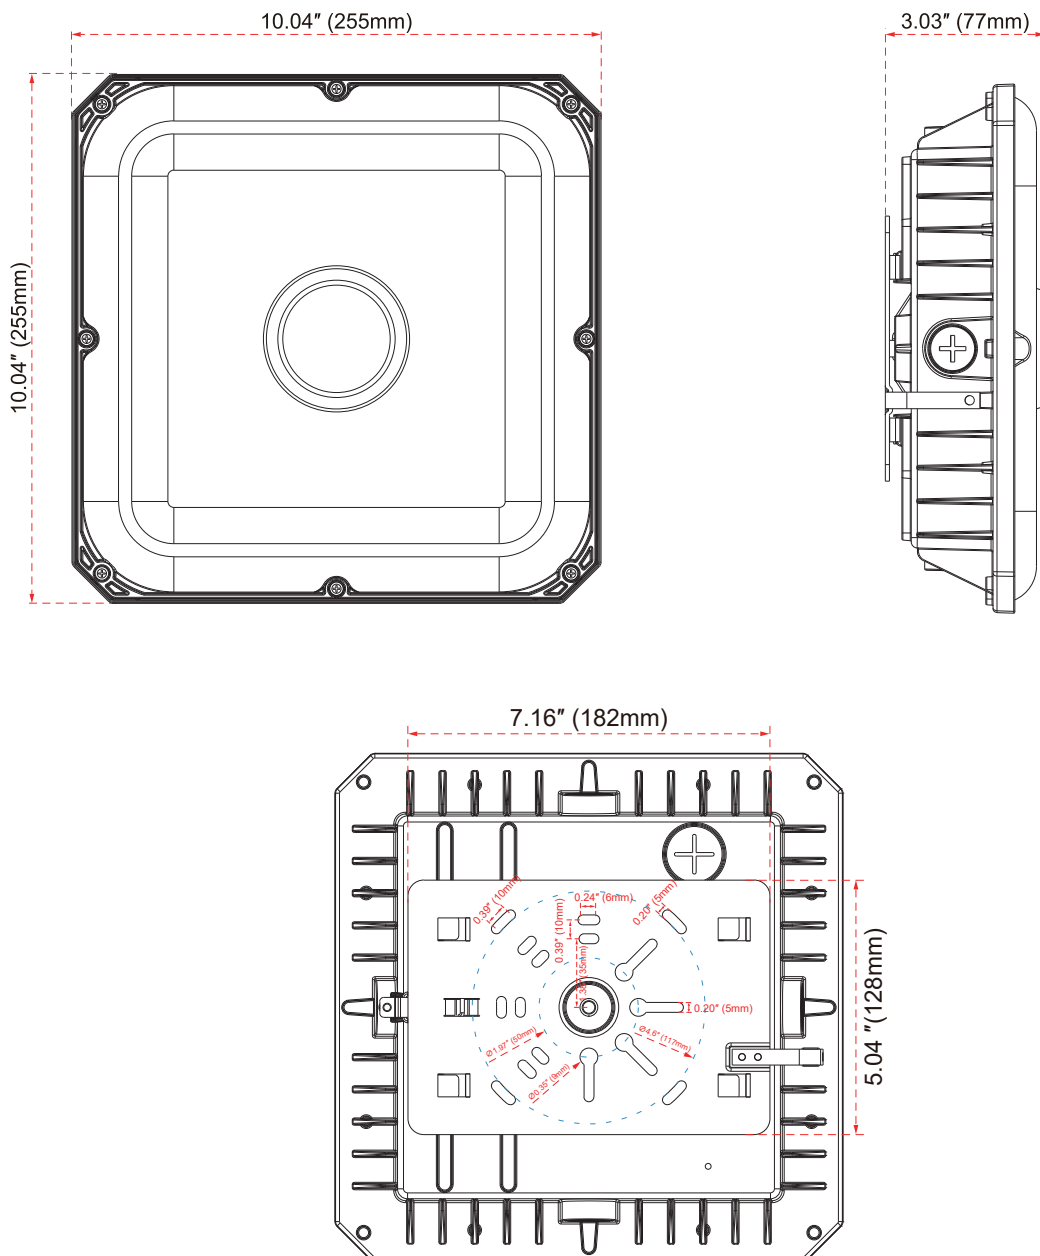


Series	Lumens	Wiring	IP Rating	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
NG-CPG-40W	6000Lm	3 pin wires	IP65	120°	Input Voltage 100-277V 50~60Hz Power Factor(%) >96	SMD 3030 chips	WW 4500K NW 5000K CW 5700K	CRI≥80
NG-CPG-60W	9000Lm							
NG-CPG-80W	12000Lm							
NG-CPG-100W	15000Lm							

Ceiling Installation


Warning: Turn off the power before installation

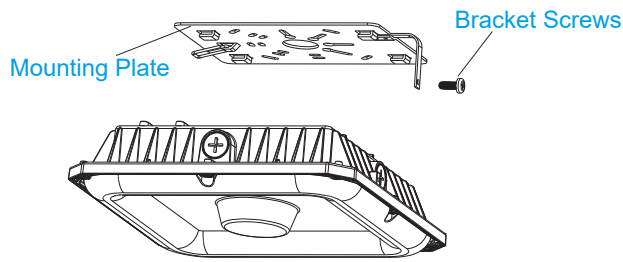


1. Unscrew the bracket screws and remove the mounting plate from the lamp housing.

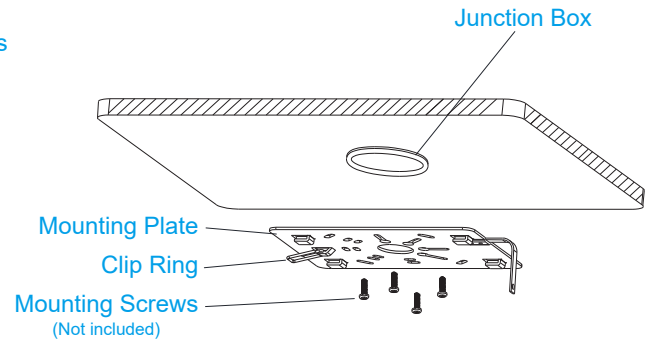

2. Secure the mounting plate to the ceiling using screws.

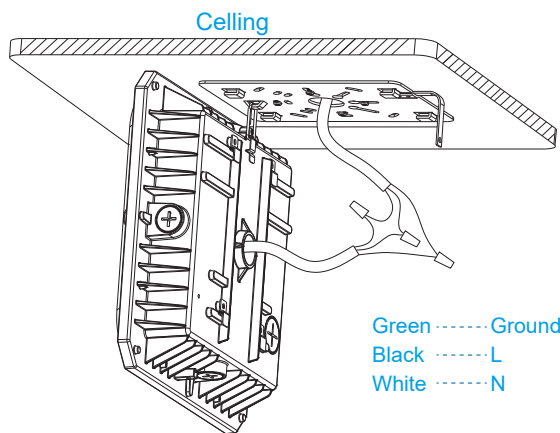

3. Insert the clip ring of the plate into the latch of the light fixture housing, and hang the fixture on the bracket.
4. Disconnect the power supply and properly connect the fixture's wiring (live wire, neutral wire, and ground wire) to the corresponding power supply wiring.

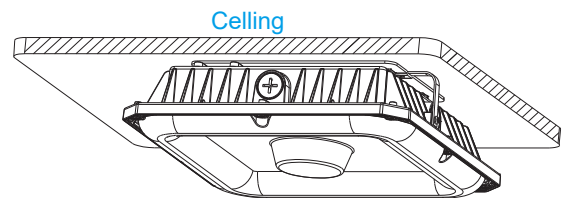


5. If there are color temperature and power adjustment functions, set them to the desired settings.
6. Push the fixture into the plate and tighten the screws to secure the fixture in place.


Suspension Rod Installation

1. Connect the lamp input line to the mains.

3/4" Suspension Rod
(Not included)

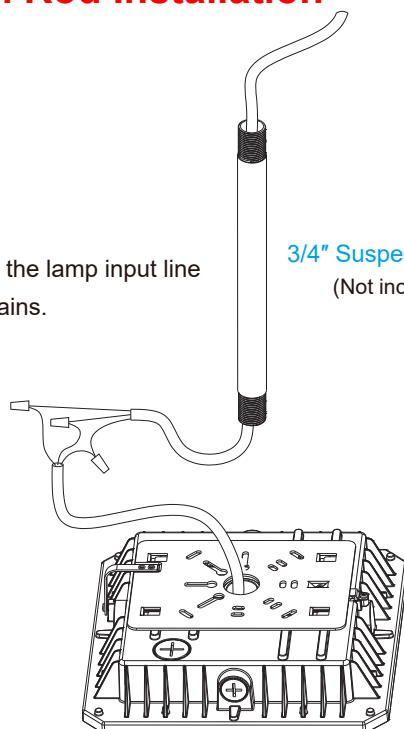


2. Twist the light fixture to the installation pole to secure it.

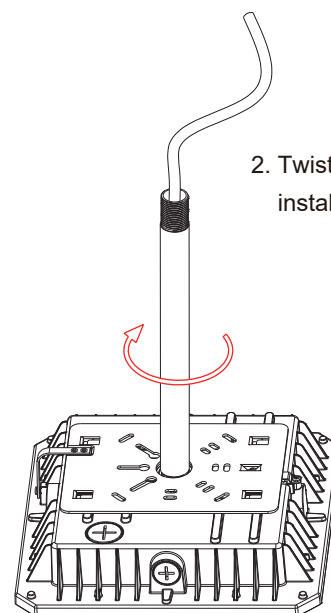



LED LIGHTS MANUFACTURER PACKAGE

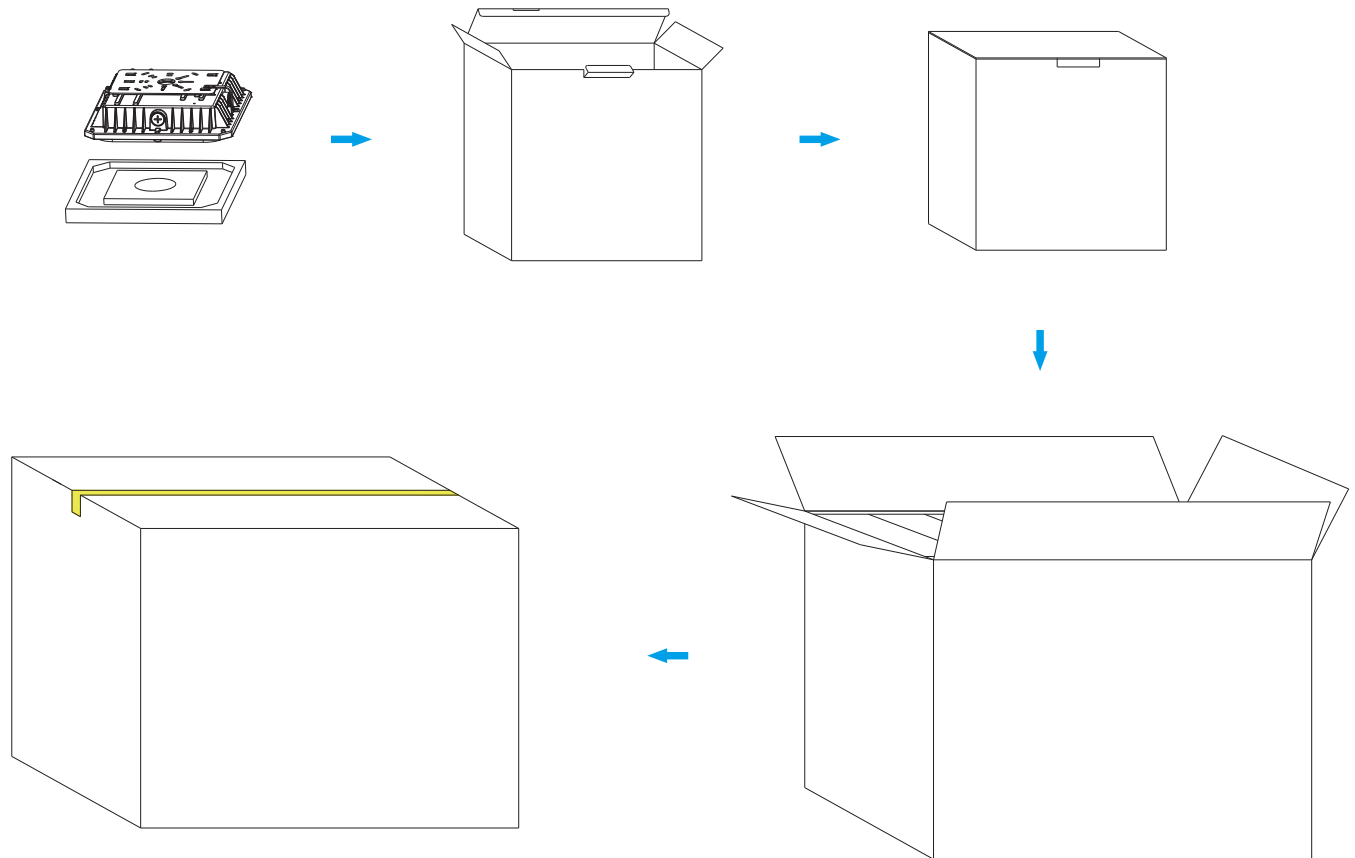

Power	Unit	Size	Gross Weight	Volume
NG-CPG-40W NG-CPG-60W NG-CPG-80W NG-CPG-100W	1 PC	280x280x95mm / 11.02**11.02**3.74"	2.1 KG / 4.63 lbs	0.007m³
	6 PCS	610x295x295mm / 24.02**11.61**11.61"	13.5 KG / 29.76 lbs	0.053m³